






LUZ-A15 104.830.60



Colours	Article no.	EAN
silver	665914	4043544752277
black	665915	4043544752284
white	665916	4043544752291

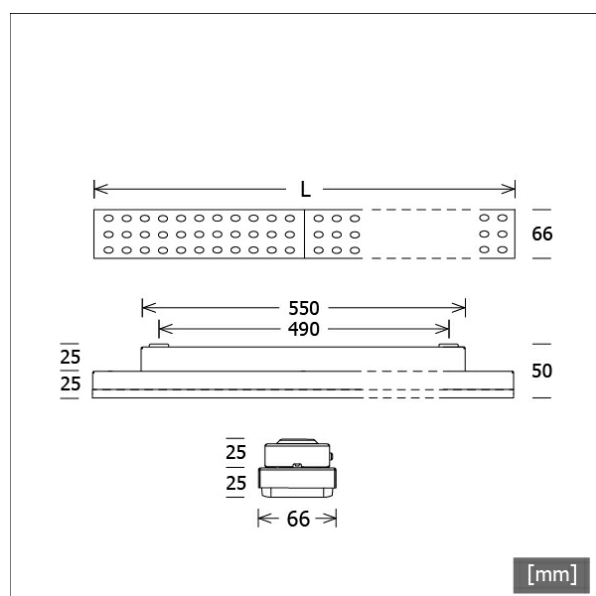


Description

- surface-mounted luminaire in rectangular design for ceiling/wall and diverse lighting tasks
- symmetrical and wide-beam light distribution (beam angle 60°)
- outstanding ease of maintenance
- no UV and thermal emissions
- housing and partly integrated mounting box made from sheet steel
- tool-free snap-in and slide mechanism between housing and mounting box
- protruding lens optics made from matt PMMA
- direct screwing on of the mounting box
- 5-pole terminal block
- ballast (LED converter) integrated


Notes

For vertical mounting the weight force must point in the locking direction.

Standard options



Special options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	26.3 W
Luminaire luminous flux	4080 lm
System efficiency	155.13 lm/W
Module efficiency	160.00 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	1447 mm
Width	66 mm
Height	50 mm
Net weight	2.76 kg
Gross weight	2.92 kg

LUZ-A15 104.830.60

LUZ | Surface-Mounted (1xLED 26W 830/3000K 4080lm 60°)



	C0	C90	C180	C270
0°	800	800	800	800
15°	887	857	887	857
30°	342	377	342	377
45°	112	117	112	117
60°	54	50	54	50
75°	34	25	34	25
90°	13	1	13	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	3.07	3.18	362.6
6.0	6.14	6.37	90.7
9.0	9.22	9.55	40.3
12.0	12.29	12.74	22.7
15.0	15.36	15.92	14.5

η	LED
Efficiency	157 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.2
UGR C90/C270	19.7
CIE Flux Codes	76 90 97 99 100
Ra/CRI	>80

LTS