



PLL 23.0385.840.1/DALI

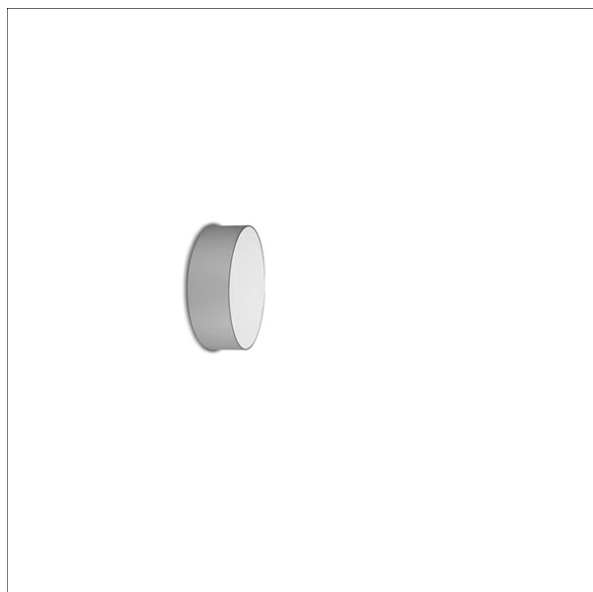

Farbe	Artikelnummer	EAN
silber	633910	4043544359070
weiß	633911	4043544359087
schwarz	642273	4043544480606

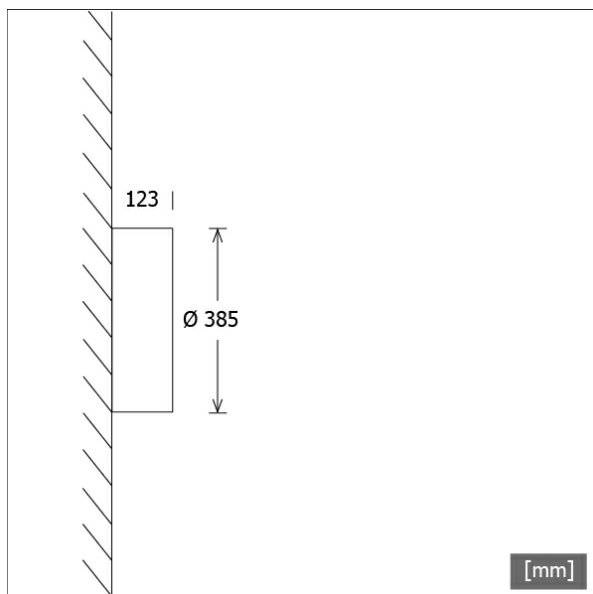

Beschreibung

- repräsentative Wandleuchte in rundem Design für homogene Beleuchtung und anspruchsvolle architektonische Lichtgestaltung
- keine UV- und Wärmestrahlung
- Stahlblechgehäuse über Bajonettverschluss abnehmbar
- Acrylglasscheibe opal
- Montageplatte für einfache Schraubbefestigung
- 5-polige Anschlussklemme
- Betriebsgerät (LED-Konverter) integriert (mit DALI Dimmung)

Standardoptionen



Sonderoptionen



Lichttechnik / Normen

Leuchtmittel	LED linear / CRI 80 / 4000 K
EPREL Lichtquellen	833873
Lebensdauer	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
Systemleistung	17.7 W
Leuchten-Lichtstrom	1980 lm
Systemeffizienz	111.86 lm/W
Moduleffizienz	190.00 lm/W
UGR Klasse	≤22
Versorgungsspannung	220 - 240 V / 50 - 60 Hz
Schutzklasse	I
Schutzart	IP20

Abmessungen / Gewichte


Außendurchmesser	385 mm
Höhe	123 mm
Nettogewicht	3.78 kg
Bruttogewicht	4.44 kg

PLL 23.0385.840.1/DALI

PLL 23.0385.840.1/DALI

PL 23 (1xLED 18W 840/4000K 1980lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	8.70 8.71		79.1
6.0	17.41 17.41		19.8
9.0	26.11 26.12		8.8
12.0	34.82 34.82		4.9
15.0	43.52 43.53		3.2

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.4
UGR C90/C270	22.4
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Zubehör



ZB-OR DONGLE
Organic Response IR-Dongle-Set



ZB-OR GATEWAY
Organic Response IoT-Gateway Kaskadenserie



ZB-OR-A SENSOR
Organic Response Sensor für Anbaumontage



ZB-OR-P SENSOR/3000
Organic Response Sensor für Pendelmontage