




FLIR 200.2030.50



Colours	Article no.	EAN
black	636616	4043544391988
silver	636617	4043544391995
white	636618	4043544392008

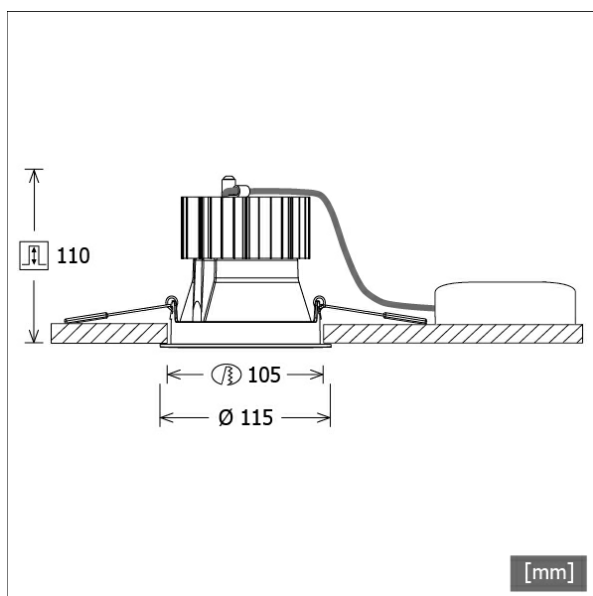

Description

- recessed spotlight with optical design variants and wide range of applications
- light-head pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring made from die-cast zinc with clear light effect ring (other decor/light effect rings and deco glasses are available as options)
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.0 W
Luminaire luminous flux	max. 2880 lm
System efficiency	106.66 lm/W
Module efficiency	156.64 lm/W
UGR class	≤28
Beam range	Wide Flood
Beam angle	51°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	115 mm
Height	112 mm
Cut-out (Ø)	105 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	110 mm
Net weight	0.87 kg
Gross weight	0.95 kg

FLIR 200.2030.50

FLIR 200.2030.50

Flixx 200 Round (FLIRZ 200.05, 1xLED 27W 830/3000K 2880lm 51°)



	C0	C90	C180	C270
0°	1431	1431	1431	1431
15°	1264	1264	1264	1264
30°	492	492	492	492
45°	17	17	17	17
60°	14	14	14	14
75°	6	6	6	6
90°	0	0	0	0


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.82	458.0
6.0	5.65	114.5
9.0	8.47	50.9
12.0	11.29	28.6
15.0	14.12	18.3

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.4
UGR C90/C270	21.4
CIE Flux Codes	95 98 100 100 100
Ra/CRI	>80

LTS

FLIR 200.2030.50

Flixx 200 Round (FLIRZ 200.24, 1xLED 27W 830/3000K 2710lm 51°)



	C0	C90	C180	C270
0°	1190	1190	1190	1190
15°	936	936	936	936
30°	415	415	415	415
45°	116	116	116	116
60°	39	39	39	39
75°	16	16	16	16
90°	0	0	0	0


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.76	358.4
6.0	5.51	89.6
9.0	8.27	39.8
12.0	11.02	22.4
15.0	13.78	14.3

η	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.4
UGR C90/C270	26.4
CIE Flux Codes	83 95 99 100 100
Ra/CRI	>80

LTS

FLIR 200.2030.50

Flixx 200 Round (FLIRZ 200.25, 1xLED 27W 830/3000K 2800lm 51°)



	C0	C90	C180	C270
0°	1364	1364	1364	1364
15°	1216	1216	1216	1216
30°	494	494	494	494
45°	27	27	27	27
60°	17	17	17	17
75°	6	6	6	6
90°	0	0	0	0


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.89	424.3
6.0	5.77	106.1
9.0	8.66	47.1
12.0	11.54	26.5
15.0	14.43	17.0

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.6
UGR C90/C270	21.6
CIE Flux Codes	94 98 100 100 100
Ra/CRI	>80

LTS

FLIR 200.2030.50

Accessories



FLIRZ 200.01
decorative ring black



FLIRZ 200.02
decorative ring silver




FLIRZ 200.03
decorative ring white



FLIRZ 200.04
light effect ring opal



FLIRZ 200.05
light effect ring clear




FLIRZ 200.06
light effect ring red matt




FLIRZ 200.07
light effect ring yellow matt



FLIRZ 200.08
light effect ring blue matt




FLIRZ 200.16
light effect ring red translucent



FLIRZ 200.17
light effect ring yellow translucent



FLIRZ 200.18
light effect ring blue translucent



FLIRZ 200.24
decorative glass opal



FLIRZ 200.25
decorative glass clear