


# ST-A 20/9000A-2-ST



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| grey    | 659390      | 4043544785893 |
| black   | 659391      | 4043544785909 |
| white   | 659392      | 4043544785916 |

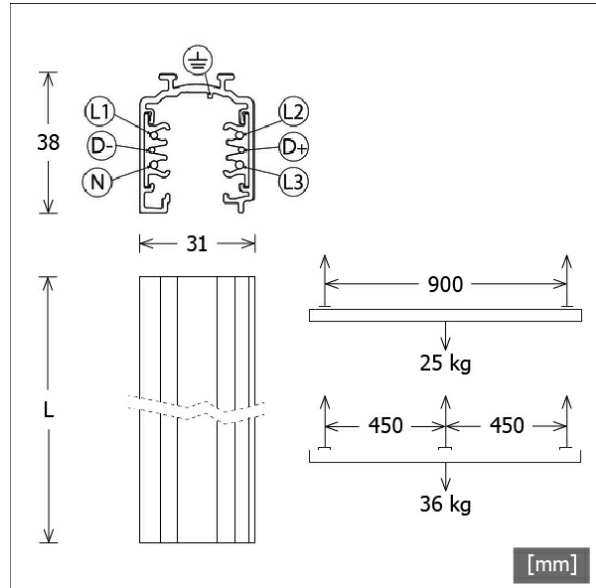

## Description

- surface-mounted track with data bus (length: 2000 mm)
- also suitable for 3-phase track adapters without bus function
- realisation of lighting tasks with DALI technology
- 6-conductor track with three separately controllable current circuits
- extruded aluminium profile which also functions as earth
- length can be adjusted on site by easily shortening the track (cutting tool ST-ZCUT/S-9000/T-N required for shortening the copper conductors)
- easy ceiling mounting with pre-punched oval mounting holes
- mechanical load diagramm see additional data sheet
- max. electrical load: AC mains power supply 3.6 kVA, 3-phase network 3 x 3.6 kVA = 10.8 kVA
- rated current and voltage: 16 A / 440 V (1 A / 50 V AC FELV)
- system components to be ordered separately

## Dimensions / Weights

|              |         |
|--------------|---------|
| Length       | 2000 mm |
| Width        | 31 mm   |
| Height       | 38 mm   |
| Net weight   | 1.75 kg |
| Gross weight | 1.85 kg |

# ST-A 20/9000A-2-ST

## Accessories



**EU 36**  
universal hook



**EU 37**  
cap for universal hook



**LA 30 SA-NORDIC**  
3-phase track adapter for wire-rope suspension



**ST-A CAP/9004**  
end cover for surface-mounted track



**ST-A F/PE-L/9002**  
end feed-in with polarity left



**ST-A F/PE-R/9001**  
end feed-in with polarity right



**ST-A FLEX/9018**  
flexible connector



**ST-A I/9010**  
electric linear connector



**ST-A L/PE-IN/9011**  
L-connector with polarity inside and feed-in



**ST-A L/PE-OUT/9012**  
L-connector with polarity outside and feed-in



**ST-A P/19/S-9000-P3**  
pendant-rod suspension  
(length: 1000 mm)



**ST-A S/9000-KIT4/1500**  
wire-rope suspension (length: 1500 mm) + fixing  
clamp

# ST-A 20/9000A-2-ST

## Accessories



**ST-A S/9000-KIT4/3000**  
wire-rope suspension (length: 3000 mm) + fixing clamp



**ST-A S/9000-KIT4/5000**  
wire-rope suspension (length: 5000 mm) + fixing clamp



**ST-A S/S-9000-111**  
ceiling bracket



**ST-A S/S-9000-116**  
ceiling bracket with Reutlinger



**ST-A S/S-9000-131**  
fixing clamp



**ST-A S28**  
wire-rope suspension 2-fold with stabilizer



**ST-A T/PE-IN-L/9015**  
T-connector with polarity inside left and feed-in



**ST-A T/PE-IN-R/9016**  
T-connector with polarity inside right and feed-in



**ST-A T/PE-OUT-L/9013**  
T-connector with polarity outside left and feed-in



**ST-A T/PE-OUT-R/9014**  
T-connector with polarity outside right and feed-in



**ST-A X/9017**  
X-connector with feed-in



**ST-IE/9003**  
electric linear connector  
(inside)



**ST-IM/S-9000-322-LA**  
mechanical coupler  
(outside)



**ST-ZLA 30**  
3-phase track adapter



**ST-ZLA 30 M10**  
3-phase track adapter with thread nipple M10



**ST-ZLA 30 M13**  
3-phase track adapter with thread nipple M13



**ST-ZLAB 30 M13**  
3-phase track bus adapter with thread nipple M13




**ST-ZCOV/S-9000/GP**  
cover strip

# ST-A 20/9000A-2-ST

## Accessories



ST-ZCUT/S-9000/T-N  
cutting tool



ST-ZSCHUKO/4230V  
socket adapter for 3-phase track