
# SCEKLP 33.20.55/B




Colours	Article no.	EAN
black	638483	4043544421623
silver	638484	4043544421630
white	638485	4043544421647



138 (SCEKLP 33.20) 155 (SCEKLP 33.30) 185 (SCEKLP 33.40, SCEKLP 33.20.xx/B, SCEKLP 33.20.xx/F)

[mm]





## Description

- · flexible recessed spotlight system for special lighting of bakery products consisting of recessed frames, light-heads and ballasts (recessed frames to be ordered separately)
- light-head pivots through 30° on gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- tool-free installation into mounting frame via flexible retaining springs
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

## Standard options



### Special options



# Lighting data / Norms

Lamps EPREL light sources

#### Lifetime

System power Luminaire luminous flux System efficiency Module efficiency UGR class Beam range Beam angle Supply voltage Protection class Type of protection

832579 L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h 36.1 W 3330 lm 92.24 lm/W 109.90 lm/W ≤22 Wide Flood 59° 220 - 240 V / 50 - 60 Hz Ш IP20

LED Spot Bakery

## **Dimensions / Weights**

Height	140 mm
Recessed depth	185 mm
Diameter of light head	155 mm
Netweight	1.36 kg
Gross weight	1.42 kg


## Recessed Spotlights · Scene 33 System



# SCEKLP 33.20.55/B

SCEKLP 33.20.55/B

Scene 33 System | Light-Head (1xLED 36W BAKERY 3330Im 55°)

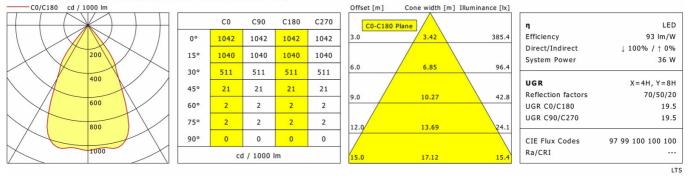

## Accessories



SCER 33.100 mounting frame 1-lamp



SCER 33.200 mounting frame 2-lamp



SCER 33.300 mounting frame 3-lamp



SCER 33.400 mounting frame 4-lamp