


# FLIR 200.2040.35/DALI




Colours	Article no.	EAN
black	641765	4043544473110
silver	641766	4043544473127
white	641767	4043544473134

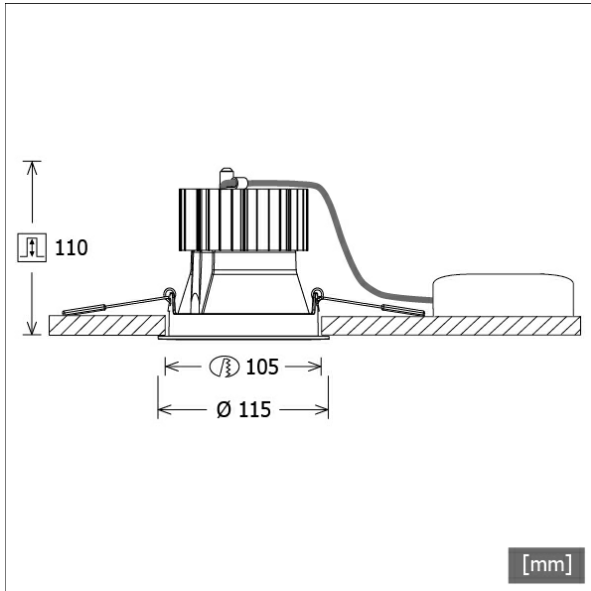

## Description

- recessed spotlight with optical design variants and wide range of applications
- light-head pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring made from die-cast zinc with clear light effect ring (other decor/light effect rings and deco glasses are available as options)
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848119
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.0 W
Luminaire luminous flux	max. 3100 lm
System efficiency	111.48 lm/W
Module efficiency	160.37 lm/W
UGR class	≤28
Beam range	Flood
Beam angle	36°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


## Dimensions / Weights

Outer diameter	115 mm
Height	112 mm
Cut-out (Ø)	105 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	110 mm
Net weight	0.93 kg
Gross weight	1.01 kg

# FLIR 200.2040.35/DALI

## FLIR 200.2040.35/DALI

Flixx 200 Round (FLIRZ 200.25, 1xLED 27W 840/4000K 3010lm 36°)



	C0	C90	C180	C270
0°	2110	2110	2110	2110
15°	1310	1310	1310	1310
30°	419	419	419	419
45°	21	21	21	21
60°	16	16	16	16
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.92	705.7
6.0	3.85	176.4
9.0	5.77	78.4
12.0	7.70	44.1
15.0	9.62	28.2

<b>η</b>	LED
Efficiency	112 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.9
UGR C90/C270	20.9
CIE Flux Codes	95 98 100 100 100
Ra/CRI	>80

LTS

## FLIR 200.2040.35/DALI

Flixx 200 Round (FLIRZ 200.05, 1xLED 27W 840/4000K 3100lm 36°)



	C0	C90	C180	C270
0°	2188	2188	2188	2188
15°	1344	1344	1344	1344
30°	409	409	409	409
45°	18	18	18	18
60°	14	14	14	14
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.90	753.7
6.0	3.80	188.4
9.0	5.70	83.7
12.0	7.60	47.1
15.0	9.50	30.1

<b>η</b>	LED
Efficiency	115 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.8
UGR C90/C270	20.8
CIE Flux Codes	96 98 100 100 100
Ra/CRI	>80

LTS

## FLIR 200.2040.35/DALI

Flixx 200 Round (FLIRZ 200.24, 1xLED 27W 840/4000K 2920lm 36°)



	C0	C90	C180	C270
0°	1466	1466	1466	1466
15°	1014	1014	1014	1014
30°	382	382	382	382
45°	104	104	104	104
60°	37	37	37	37
75°	15	15	15	15
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.29	475.6
6.0	4.59	118.9
9.0	6.88	52.8
12.0	9.18	29.7
15.0	11.47	19.0

<b>η</b>	LED
Efficiency	108 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.2
UGR C90/C270	26.2
CIE Flux Codes	84 95 99 100 100
Ra/CRI	>80

LTS

# FLIRZ 200.2040.35/DALI

## Accessories



**FLIRZ 200.01**  
decorative ring black



**FLIRZ 200.02**  
decorative ring silver



**FLIRZ 200.03**  
decorative ring white



**FLIRZ 200.04**  
light effect ring opal



**FLIRZ 200.05**  
light effect ring clear



**FLIRZ 200.06**  
light effect ring red matt



**FLIRZ 200.07**  
light effect ring yellow matt



**FLIRZ 200.08**  
light effect ring blue matt




**FLIRZ 200.16**  
light effect ring red translucent



**FLIRZ 200.17**  
light effect ring yellow translucent



**FLIRZ 200.18**  
light effect ring blue translucent



**FLIRZ 200.24**  
decorative glass opal



**FLIRZ 200.25**  
decorative glass clear



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-R SENSOR**  
Organic Response sensor for recessed mounting