


LKIP-P 070.005.1 AOB/...

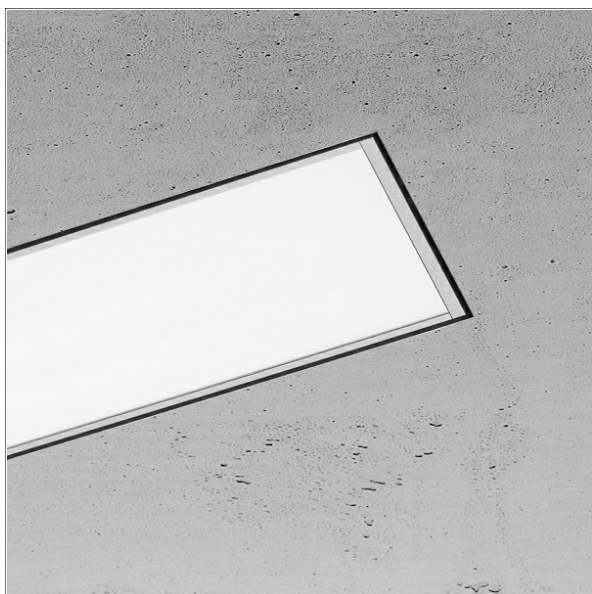

Description

- light trunking system (made-to-measure) for recessed mounting with gap into fairfaced concrete flush with ceiling in the outdoor area
- high-quality extruded aluminium profile for fixing into concrete recessed housing
- concrete recessed housing, light-inserts and (necessary) accessories to be ordered separately
- opal flush acrylic glass diffuser made from PMMA with tool-free snap-in technology
- quick-mounting into concrete recessed housing via turning bolts

Notes

For luminaires with only "1 light-insert" add "+5 mm" for end covers. Required mounting space of concrete recessed housing on formwork is 20 mm surrounding. The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. The profiles with mounted acrylic glass diffuser have protection type IP40 (no floor mounting possible), the light inserts have protection type IP65.

Lighting data / Norms

Type of protection IP40


Dimensions / Weights

Width 70 mm
Height 80 mm
Net weight 1.94 kg
Gross weight 2.04 kg

Special dimensions

order length of concrete housing = length of empty profile + (2 x 3 mm thickness of end covers) + (2 x 3.5 mm gap) = length of empty profile + 13 mm

Colours	Article no.	EAN
silver anodised	668734	4043544804044
black	668735	4043544804051
white	668736	4043544804068

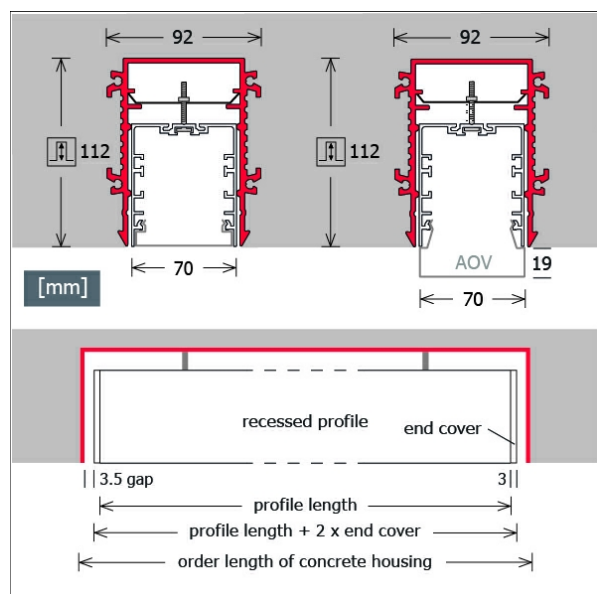

LKIP-P 070.005.1 AOB/...

Accessories



LK-Z070 AOB-K-001
concealing unit for acrylic glass flush



LK-Z070 AOB/...
opal acrylic glass flush as replacement
(length made-to-measure)



LK-Z070 BA/...
blind cover
(length made-to-measure)




LK-Z070 SENSOR/OR
Organic Response sensor (DALI PS3) for Lichtkanal
070



LK-Z070.001
end covers
(2 pieces)



LK-Z070.005.1 BT/...
concrete recessed housing trimless
(length made-to-measure)



LK-Z070.005.20
connector kit for concrete housing



LK-Z070.100
connection kit with earthing



LKIP-Z070.119
connection kit



STRL-LK-Z070-060.102.00
connector kit linear

LKIP-P 070.005.1 AOB/...

Light inserts



Name	Description
LKIP-L 070.10830.0848.1/DALI	3000 K, 848 mm, 38.4 W , 3570 lm
LKIP-L 070.10840.0848.1/DALI	4000 K, 848 mm, 38.4 W , 3760 lm
LKIP-L 070.10830.1128.1/DALI	3000 K, 1128 mm, 51.2 W , 4750 lm
LKIP-L 070.10840.1128.1/DALI	4000 K, 1128 mm, 51.2 W , 5010 lm
LKIP-L 070.10830.1408.1/DALI	3000 K, 1408 mm, 64.0 W , 5940 lm

Name	Description
LKIP-L 070.10840.1408.1/DALI	4000 K, 1408 mm, 64.0 W , 6260 lm
LKIP-L 070.10830.1688.1/DALI	3000 K, 1688 mm, 76.8 W , 7120 lm
LKIP-L 070.10840.1688.1/DALI	4000 K, 1688 mm, 76.8 W , 7510 lm
LKIP-L 070.10840.1968.1/DALI	4000 K, 1968 mm, 89.6 W , 8760 lm
LKIP-L 070.10830.1968.1/DALI	3000 K, 1968 mm, 89.6 W , 8310 lm