

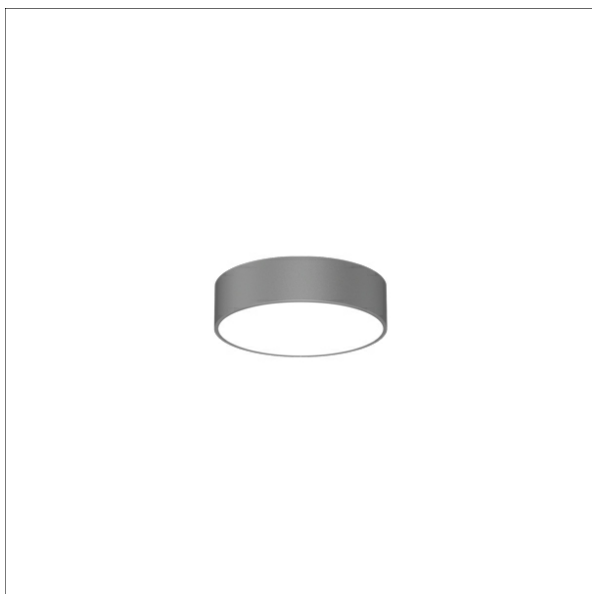
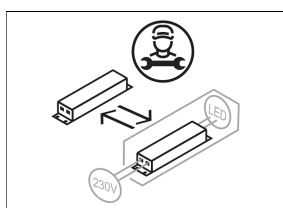


# SKIS-A 101.840.1/DALI

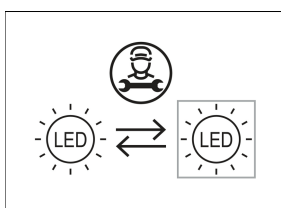

Colours	Article no.	EAN
silver	667423	4043544767387
black	667424	4043544767394
white	667425	4043544767400

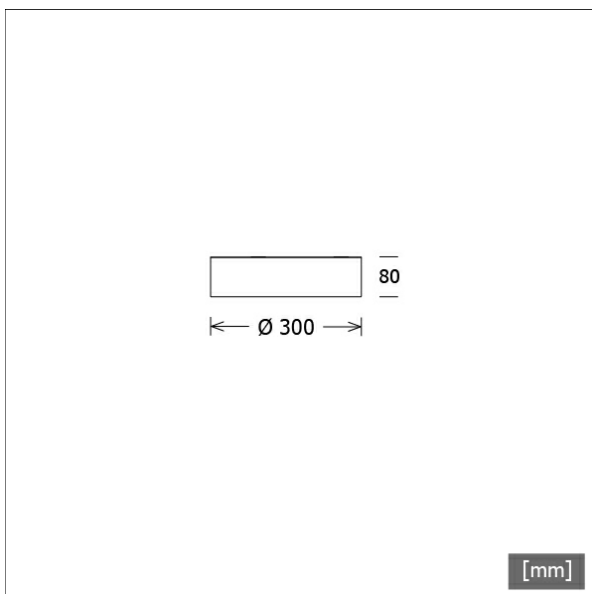

## Description

- flat dimmable ceiling and wall luminaire with DALI technology in circular design for homogeneous direct illumination and sophisticated architectural lighting
- outstanding ease of maintenance
- no UV and thermal emissions
- high-quality sheet steel housing with removable LED unit
- opal acrylic glass pane
- screwable mounting plate (with securing carabine), fixing of the luminaire via bayonet catch (grub screw for locking)
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

## Standard options



## Special options



## Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	993701
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	17.8 W
Luminaire luminous flux	1440 lm
System efficiency	80.89 lm/W
Module efficiency	175.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights

Outer diameter	300 mm
Height	80 mm
Net weight	2.84 kg
Gross weight	3.05 kg

# SKIS-A 101.840.1/DALI

Skive Small | Anbau (1xLED 18W 840/4000K 1440lm)



	C0	C90	C180	C270
0°	347	347	347	347
15°	333	334	333	334
30°	296	297	296	297
45°	236	236	236	236
60°	156	156	156	156
75°	65	65	65	65
90°	0	0	0	0

cd / 1000 lm

Offset [m]	Cone width [m]		Illuminance [lx]
3.0	9.25   9.24		55.5
6.0	18.50   18.49		13.9
9.0	27.75   27.73		6.2
12.0	37.00   36.98		3.5
15.0	46.25   46.22		2.2

<b>η</b>	LED
Efficiency	80 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.2
UGR C90/C270	23.2
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

## Accessories



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-A SENSOR**  
Organic Response sensor for surface mounting