


SCEKLP 33.5040.35



Colours	Article no.	EAN
black	655191	4043544639592
silver	655192	4043544639608
white	655193	4043544639615

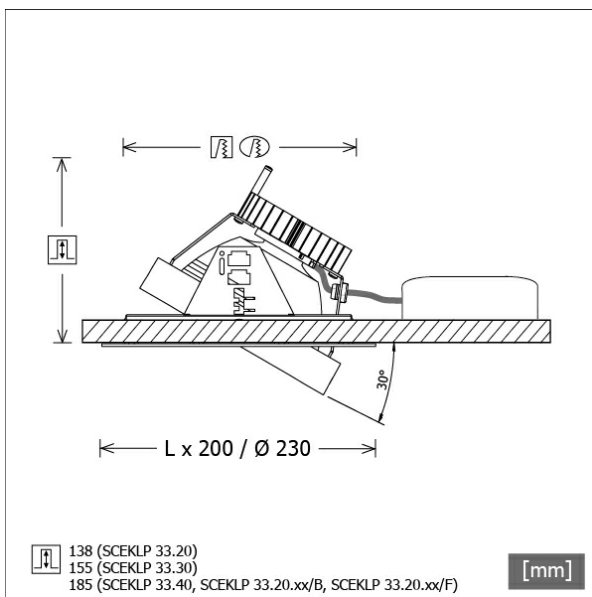

Description

- flexible recessed spotlight system consisting of recessed frames, light-heads and ballasts (recessed frames to be ordered separately)
- light-head pivots through 30° on gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- tool-free installation into mounting frame via flexible retaining springs
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848105
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	52.0 W
Luminaire luminous flux	5620 lm
System efficiency	108.07 lm/W
Module efficiency	167.61 lm/W
UGR class	≤22
Beam range	Flood
Beam angle	30°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

Dimensions / Weights

Height	165 mm
Recessed depth	185 mm
Diameter of light head	155 mm
Net weight	1.38 kg
Gross weight	1.43 kg




SCEKLP 33.5040.35

SCEKLP 33.5040.35

Scene 33 System | Light-Head (1xLED 52W 840/4000K 5620lm 35°)

— C0/C180 cd / 1000 lm

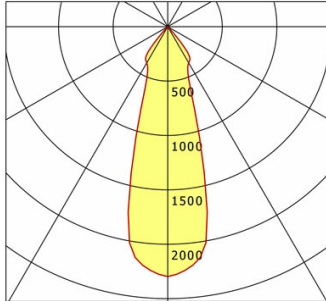

	C0	C90	C180	C270
0°	2297	2297	2297	2297
15°	1214	1214	1214	1214
30°	384	384	384	384
45°	18	18	18	18
60°	5	5	5	5
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.66	1434.2
6.0	3.32	358.6
9.0	4.98	159.4
12.0	6.63	89.6
15.0	8.29	57.4

η	LED
Efficiency	108 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	52 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.7
UGR C90/C270	20.7
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>80

LTS

Accessories




SCER 33.100
mounting frame 1-lamp



SCER 33.200
mounting frame 2-lamp



SCER 33.300
mounting frame 3-lamp



SCER 33.400
mounting frame 4-lamp