

LUNM 304.840.1/DALI



Colours	Article no.	EAN
silver	665773	4043544750860
black	665774	4043544750877
white	665775	4043544750884

Description

- can be used as ceiling, wall or pendant luminaire (suspension to be ordered separately)
- direct-indirect illumination without light-effect ring
- low indirect light component for ceiling lighting
- outstanding ease of maintenance
- no UV and thermal emissions
- luminaire consisting of sheet steel housing for ballast and light unit
- light unit can be separated from ballast housing without tools via bayonet catch (with safety rope)
- opal acrylic glass diffuser
- ballast housing for direct screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options






Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	993703 993701
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	37.7 W
Luminaire luminous flux	4900 lm
System efficiency	129.97 lm/W
Module efficiency	175.00 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	856 mm
Height	92 mm
Net weight	14.90 kg
Gross weight	19.00 kg

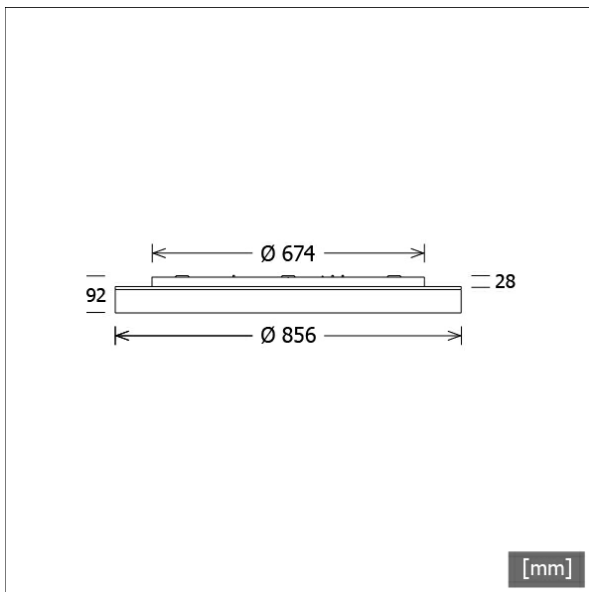




LUNM 304.840.1/DALI

Lunata Medium (1xLED 38W 840/4000K 4900lm)



	C0	C90	C180	C270
0°	339	339	339	339
15°	325	326	325	326
30°	288	288	288	288
45°	229	229	229	229
60°	153	153	153	153
75°	64	64	64	64
90°	1	1	1	1

cd / 1000 lm



η	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 98% / ↑ 2%
System Power	38 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.7
CIE Flux Codes	47 79 96 98 100
Ra/CRI	>80

LTS

Accessories



L 72/3000 DIM
wire-rope kit 4-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting