


# SCEKLP 20.2030.45



Colours	Article no.	EAN
black	638352	4043544420435
silver	638353	4043544420442
white	638354	4043544420459

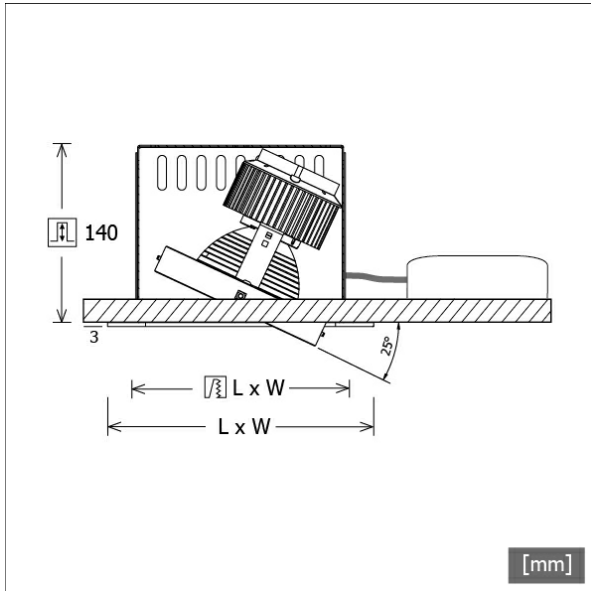


## Description

- flexible recessed spotlight system consisting of recessed housings, light-heads and ballasts (recessed housings to be ordered separately)
- light-head pivots through 25° with gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head gimbals made from die-cast zinc
- thermal management with passive cooling (heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- assembly into the recessed housing takes place in the factory
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

## Standard options



## Special options

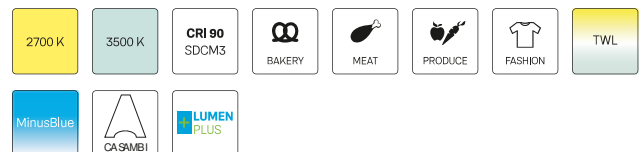

## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	25.8 W
Luminaire luminous flux	2650 lm
System efficiency	102.71 lm/W
Module efficiency	156.64 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	48°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20

## Dimensions / Weights


Height	143 mm
Recessed depth	105 mm
Diameter of light head	140 mm
Net weight	0.95 kg
Gross weight	1.01 kg

# SCEKLP 20.2030.45

## SCEKLP 20.2030.45


Scene 2 System | Light-Head (1xLED 26W 830/3000K 2650lm)

C0/C180 cd / 1000 lm

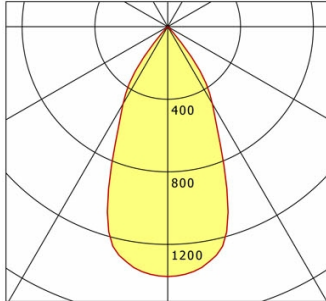

	C0	C90	C180	C270
0°	1377	1377	1377	1377
15°	1216	1216	1216	1216
30°	491	491	491	491
45°	19	19	19	19
60°	3	3	3	3
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

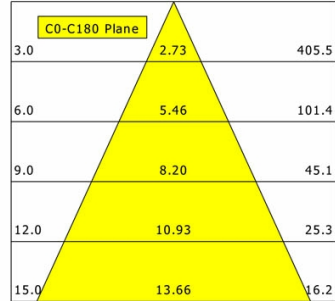

<b>η</b>	LED
Efficiency	102 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.1
UGR C90/C270	20.1
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80

LTS

### Accessories



**SCER 2.1140**  
recessed housing 1-lamp



**SCER 2.2140**  
recessed housing 2-lamp



**SCER 2.3140**  
recessed housing 3-lamp



**SCER 2.4140**  
recessed housing 4-lamp