



SKIXL-A 118.830.1/DALI

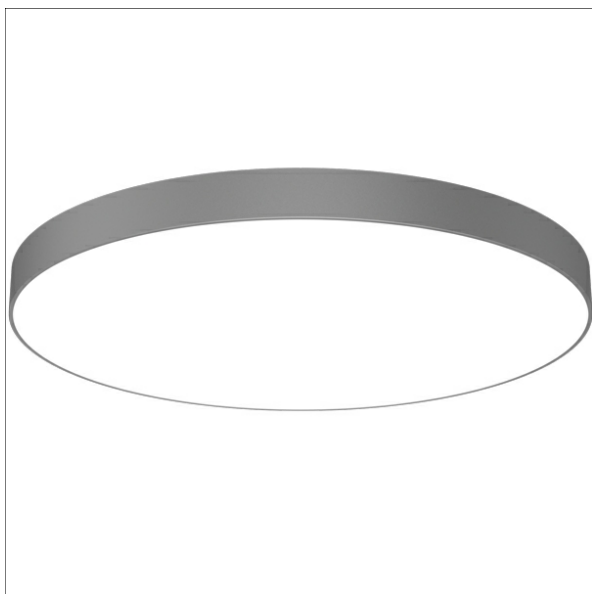

Colours	Article no.	EAN
silver	667438	4043544767530
black	667439	4043544767547
white	667440	4043544767554

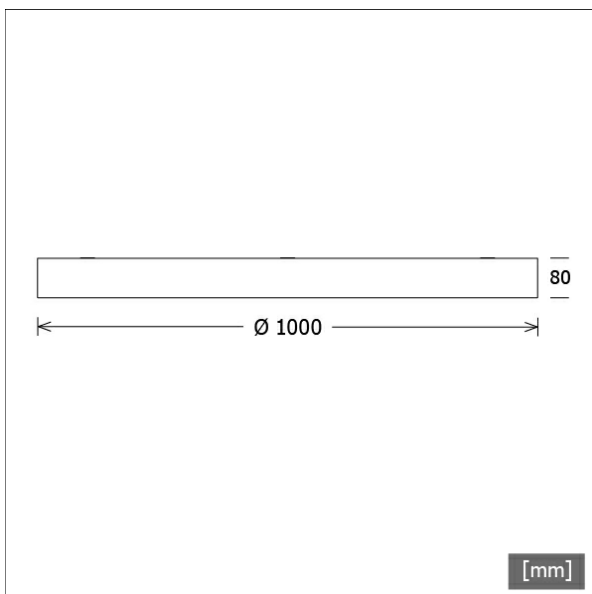

Description

- flat dimmable ceiling and wall luminaire with DALI technology in circular design for homogeneous direct illumination and sophisticated architectural lighting
- outstanding ease of maintenance
- no UV and thermal emissions
- high-quality sheet steel housing with removable LED unit
- opal acrylic glass pane
- screwable mounting plate (with securing carabine), fixing of the luminaire via bayonet catch (grub screw for locking)
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	993702 993704
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	156.1 W
Luminaire luminous flux	18160 lm
System efficiency	116.33 lm/W
Module efficiency	163.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	1000 mm
Height	80 mm
Net weight	22.11 kg
Gross weight	23.52 kg

SKIXL-A 118.830.1/DALI

Skive XLarge | Anbau (1xLED 156W 830/3000K 18160lm)



	C0	C90	C180	C270
0°	346	346	346	346
15°	332	333	332	333
30°	296	294	296	294
45°	235	235	235	235
60°	157	156	157	156
75°	66	66	66	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
3.0	9.32 9.30		697.4
6.0	18.64 18.61		174.4
9.0	27.96 27.91		77.5
12.0	37.28 37.21		43.6
15.0	46.60 46.51		27.9

η	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	156 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.5
UGR C90/C270	23.4
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting