



# SKIXL-A 118.840.1/DALI

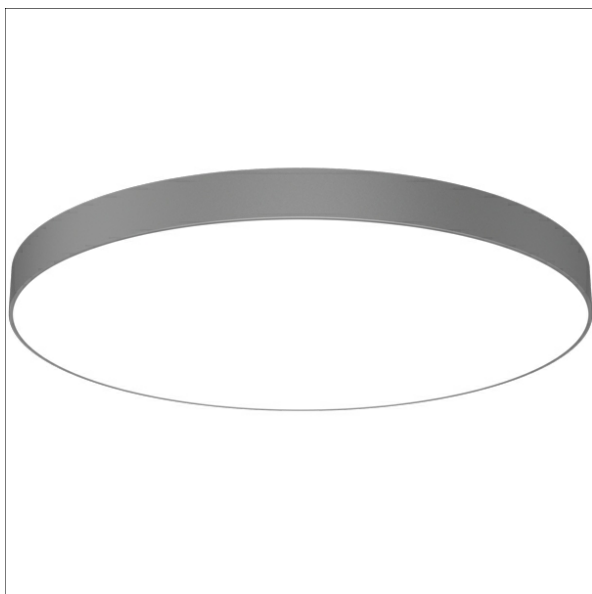

Colours	Article no.	EAN
silver	667441	4043544767561
black	667442	4043544767578
white	667443	4043544767585

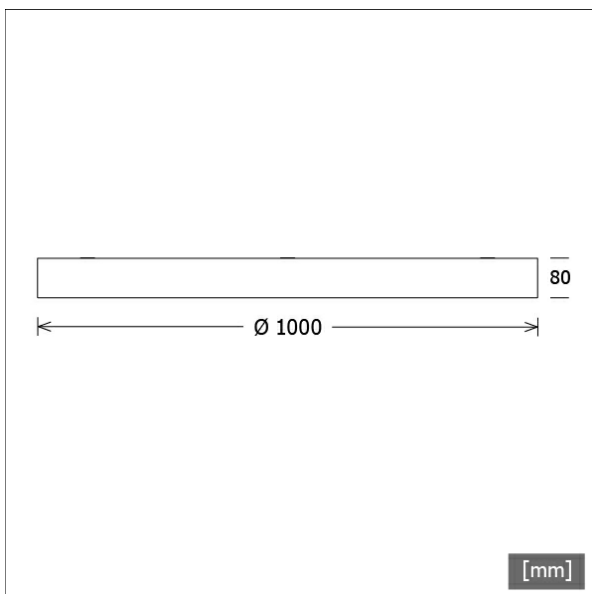

## Description

- flat dimmable ceiling and wall luminaire with DALI technology in circular design for homogeneous direct illumination and sophisticated architectural lighting
- outstanding ease of maintenance
- no UV and thermal emissions
- high-quality sheet steel housing with removable LED unit
- opal acrylic glass pane
- screwable mounting plate (with securing carabine), fixing of the luminaire via bayonet catch (grub screw for locking)
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

## Standard options



## Special options



## Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	993701 993703
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	156.1 W
Luminaire luminous flux	18620 lm
System efficiency	119.28 lm/W
Module efficiency	175.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights

Outer diameter	1000 mm
Height	80 mm
Net weight	22.11 kg
Gross weight	23.52 kg

# SKIXL-A 118.840.1/DALI

Skive XLarge | Anbau (1xLED 156W 840/4000K 18620lm)



	C0	C90	C180	C270
0°	346	346	346	346
15°	332	333	332	333
30°	296	294	296	294
45°	235	235	235	235
60°	157	156	157	156
75°	66	66	66	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
3.0	9.32   9.30		715.1
6.0	18.64   18.61		178.8
9.0	27.96   27.91		79.5
12.0	37.28   37.21		44.7
15.0	46.60   46.51		28.6

<b>η</b>	LED
Efficiency	119 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	156 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.5
UGR C90/C270	23.5
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

## Accessories



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-A SENSOR**  
Organic Response sensor for surface mounting