

# LUNXXS 200.830.1/DALI



## Description

- can be used as ceiling, wall or pendant luminaire (suspension to be ordered separately)
- direct illumination with light-effect ring
- outstanding ease of maintenance
- no UV and thermal emissions
- luminaire consisting of sheet steel housing for ballast and light unit
- light unit can be separated from ballast housing without tools via bayonet catch (with safety rope)
- opal acrylic glass diffuser
- ballast housing for direct screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

## Standard options



Colours	Article no.	EAN
silver	665629	4043544749451
black	665630	4043544749468
white	665631	4043544749475

## Special options





## Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	993702
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	12.6 W
Luminaire luminous flux	1060 lm
System efficiency	84.12 lm/W
Module efficiency	163.00 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Outer diameter	315 mm
Height	94 mm
Net weight	2.97 kg
Gross weight	3.12 kg

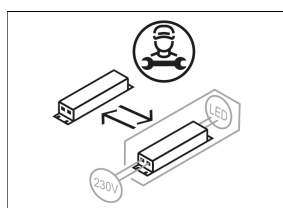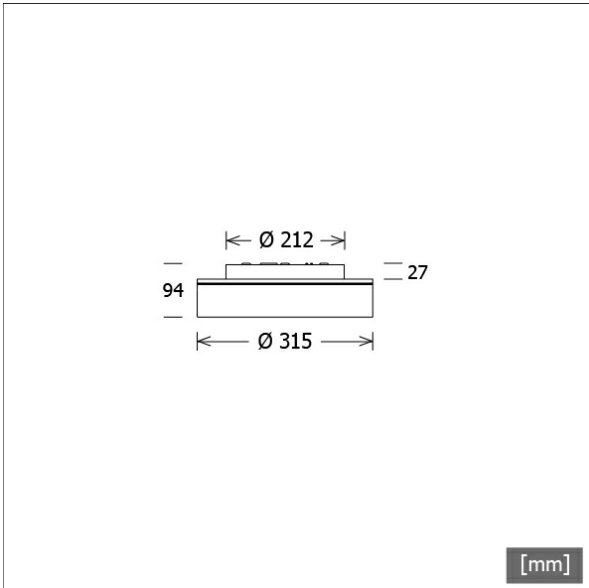

# LUNXXS 200.830.1/DALI

Lunata XXSmall (1xLED 13W 830/3000K 1060lm)



	C0	C90	C180	C270
0°	348	348	348	348
15°	334	334	334	334
30°	295	295	295	295
45°	233	234	233	234
60°	156	156	156	156
75°	66	66	66	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
3.0	C0-C180 Plane: 9.14	C90-C270 Plane: 9.15	41.0
6.0	18.28	18.29	10.3
9.0	27.42	27.44	4.6
12.0	36.56	36.58	2.6
15.0	45.70	45.73	1.6

<b>η</b>	LED
Efficiency	82 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.8
UGR C90/C270	21.8
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80

LTS

## Accessories



**L 83/1500 DIM**  
wire-rope kit 3-fold  
(length: 1500 mm, 5-core cable)



**L 83/3000 DIM**  
wire-rope kit 3-fold  
(length: 3000 mm, 5-core cable)



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-A SENSOR**  
Organic Response sensor for surface mounting



**ZB-OR-P SENSOR/3000**  
Organic Response sensor for pendant mounting