


PLL 23.1000.840.1/DALI



Farbe	Artikelnummer	EAN
silber	633923	4043544359193
weiß	633924	4043544359209
schwarz	642271	4043544480583

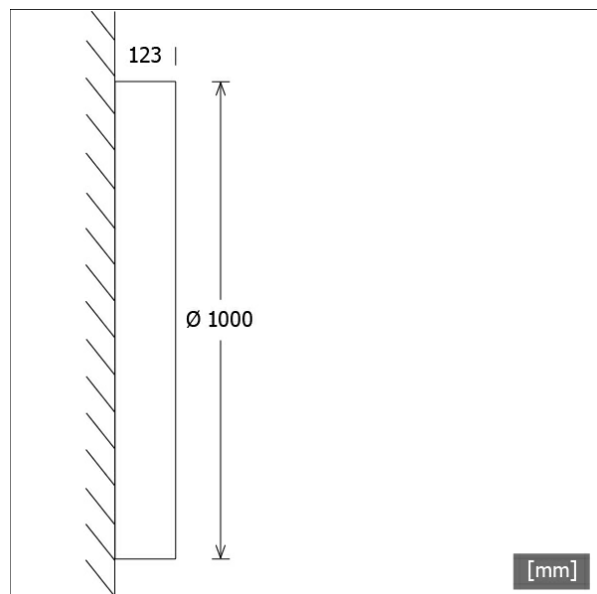

Beschreibung

- repräsentative Wandleuchte in rundem Design für homogene Beleuchtung und anspruchsvolle architektonische Lichtgestaltung
- keine UV- und Wärmestrahlung
- Stahlblechgehäuse über Bajonettverschluss abnehmbar
- Acrylglascheibe opal
- Montageplatte für einfache Schraubbefestigung
- 5-polige Anschlussklemme
- Betriebsgerät (LED-Konverter) integriert (mit DALI Dimmung)

Standardoptionen



Sonderoptionen



Lichttechnik / Normen

Leuchtmittel	LED linear / CRI 80 / 4000 K
EPREL Lichtquellen	833873 833878
Lebensdauer	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
Systemleistung	141.3 W
Leuchten-Lichtstrom	17500 lm
Systemeffizienz	123.84 lm/W
Moduleffizienz	187.99 lm/W
UGR Klasse	≤25
Versorgungsspannung	220 - 240 V / 50 - 60 Hz
Schutzklasse	I
Schutzart	IP20

Abmessungen / Gewichte


Außendurchmesser	1000 mm
Höhe	123 mm
Nettogewicht	19.00 kg
Bruttogewicht	23.00 kg

PLL 23.1000.840.1/DALI

PLL 23.1000.840.1/DALI

PL 23 (1xLED 141W 840/4000K 17500lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	357	357	357	357
15°	342	343	342	343
30°	299	297	299	297
45°	234	234	234	234
60°	154	154	154	154
75°	65	64	65	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	8.81 8.73	694.2	
6.0	17.63 17.47	173.6	
9.0	26.44 26.20	77.1	
12.0	35.26 34.94	43.4	
15.0	44.07 43.67	27.8	

η	LED
Efficiency	124 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	141 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.2
UGR C90/C270	23.2
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Zubehör



ZB-OR DONGLE
Organic Response IR-Dongle-Set



ZB-OR GATEWAY
Organic Response IoT-Gateway Kaskadenserie



ZB-OR-A SENSOR
Organic Response Sensor für Anbaumontage



ZB-OR-P SENSOR/3000
Organic Response Sensor für Pendelmontage