


FLIQ 400.2040.01



Colours	Article no.	EAN
black	636474	4043544390561
silver	636475	4043544390578
white	636476	4043544390585

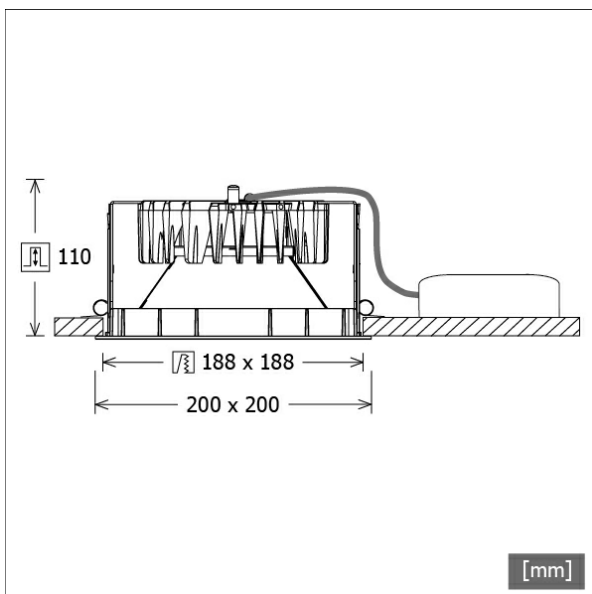

Description

- recessed spotlight with optical design variants for general lighting
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling (heat sink made from die-cast aluminium)
- non-reflective matt aluminium reflector for highest luminous efficiency and best glare-free lighting
- front/recessed frame made from die-cast zinc with clear light effect frame (other decor/light effect frames and deco glasses are available as options)
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms


Lamps	LED Modul / CRI 80 / 4000 K
EPREL light sources	891010
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	21.0 W
Luminaire luminous flux	max. 2590 lm
System efficiency	123.33 lm/W
Module efficiency	173.48 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights


Length	200 mm
Width	200 mm
Height	112 mm
Cut-out (LxW)	188 x 188 mm
Ceiling thickness	5.0 - 50.0 mm
Recessed depth	110 mm
Net weight	1.21 kg
Gross weight	1.27 kg

FLIQ 400.2040.01

Flixx 400 Square (FLIQZ 400.05, 1xLED 21W 840/4000K 2590lm)




	C0	C90	C180	C270
0°	644	644	644	644
15°	639	647	639	647
30°	496	496	496	496
45°	178	174	178	174
60°	16	15	16	15
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

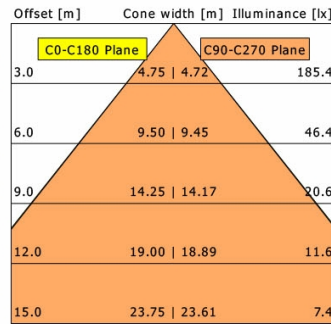


η	LED
Efficiency	123 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.1
UGR C90/C270	20.0
CIE Flux Codes	81 99 100 100 100
Ra/CRI	>80

LTS

Flixx 400 Square (FLIQZ 400.24, 1xLED 21W 840/4000K 2480lm)




	C0	C90	C180	C270
0°	635	635	635	635
15°	577	577	577	577
30°	407	407	407	407
45°	204	204	204	204
60°	80	80	80	80
75°	27	27	27	27
90°	0	0	0	0
cd / 1000 lm				




η	LED
Efficiency	118 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.8
UGR C90/C270	23.8
CIE Flux Codes	67 91 98 100 100
Ra/CRI	>80

LTS

Flixx 400 Square (FLIQZ 400.25, 1xLED 21W 840/4000K 2540lm)



	C0	C90	C180	C270
0°	630	630	630	630
15°	629	629	629	629
30°	507	507	507	507
45°	213	213	213	213
60°	25	25	25	25
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				



η	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.4
UGR C90/C270	20.4
CIE Flux Codes	79 98 100 100 100
Ra/CRI	>80

LTS

FLIQ 400.2040.01

Accessories



FLIQZ 400.01
decorative frame black



FLIQZ 400.02
decorative frame silver



FLIQZ 400.03
decorative frame white



FLIQZ 400.04
light effect frame opal



FLIQZ 400.05
light effect frame clear



FLIQZ 400.06
light effect frame red matt



FLIQZ 400.07
light effect frame yellow matt



FLIQZ 400.08
light effect frame blue matt




FLIQZ 400.16
light effect frame red translucent



FLIQZ 400.17
light effect frame yellow translucent



FLIQZ 400.18
light effect frame blue translucent



FLIQZ 400.24
decorative glass opal



FLIQZ 400.25
decorative glass clear



NOL 50B/3H/DALI
LED emergency light-unit



ZVP 100
universal reinforcement frame
(module 625 x 625)